


Tipo	Type	sospensione pneumatica air suspension
Potenza RMS	Power RMS (W)	90
Potenza Massima	Max Power (W)	180
Risp. in frequenza	Frequency response (Hz)	45-20K
Sensibilità	Sensitivity dB (1W/1m)	90
Impedenza nominale	Nominal impedance (Ω)	8
Woofer cono in cellulosa	Cellulose cone woofer \varnothing (cm)	13,0
Tweeter a cupola in seta	Silk dome tweeter \varnothing (cm)	2,0
Dimensioni	Dimensions H x W x D (cm)	48,0 x 24,0 x 24,0
Peso	Weight (Kg)	4,2

Colori - Colours



Colori speciali - Special Colours

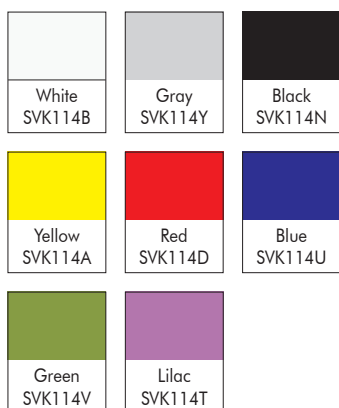

Sistemi di fissaggio Fixing System	Pavimento Floor	Soffitto Ceiling	Parete Wall
Codice Code	HPX209X Acciaio inox Stainless steel	HWX016S Acciaio inox satinato Satin stainless steel	HWX031S Acciaio inox satinato Satin stainless steel
		HWX016L Acciaio inox lucido Polished stainless steel	HWX031L Acciaio inox lucido Polished stainless steel
Dimensioni Dimensions H x W x D (cm)	208,0 x 35,0 x 35,0	15,0 x 10,0 x 10,0	30,0 x 10,0 x 10,0
Peso Weight (Kg)	10,1	0,5	0,6



Pavimento
Floor



Soffitto
Ceiling



Parete
Wall